# Sealed Lead-Acid Battery

Absorbant Glass Mat (AGM) technology for superior performance. Valve regulated, spill proof construction allows safe operation in any position. Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified. U.L. recognized under file number MH 20567.



Maintenance-Free

## Specification

Nominal Voltage			12 volts		
<b>Nominal Capacity</b>			77° F (25° C)		
20-hr. (0.60A)			12.0 Ah		
10-hr. (1.08A)			10.8 Ah		
5-hr. (1.92A)			9.60 Ah		
1-hr. (7.20A)			7.20 Ah		
<b>Approximate Weig</b>	jht		8.16 lbs (3.7 kg)		
<b>Internal Resistanc</b>	<b>e</b> (approx.)		$20 \mathrm{m}\Omega$		
Shelf Life (% of nor	mal capacity at	68° F (20° C)			
3 Months 6 M		onths	12 Months		
91%	83%		64%		
<b>Temperature Dep</b>	endency of Cap	acity	city (20 hour rate)		
104° F (40°C)	77° F (25°C)	32°F (0°C)	5°F (-15°C)		
102%	100%	85%	65%		
AGM Operational Temperature					
Charge		32°F to 104	32°F to 104°F (0°C to 40°C)		
Discharge		5°F to 113°	5°F to 113°F (-15°C to 45°C)		
AGM Storage Temperature		5°F to 104°	5°F to 104°F (-15°C to 40°C)		



Due to continuous improvements to our products, product may vary slightly from depiction

#### Charge Method (Constant Voltage)

enarge member (constar	it voitage,
Cycle Use (Repeating Use	2)
Initial Current	3.6 A or smaller
Control Voltage	14.6-14.8 V
Float Use	
Control Voltage	13.6-13.8 V

## Physical Dimensions: in (mm)







**L:** 6.00 in (152 mm) **W:** 3.90 in (99.0 mm) **H:** 3.80 in (96.0 mm) **TH:** 4.10 in (104 mm)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.


#### **Terminals**



# **Discharge Time vs. Discharge Current**

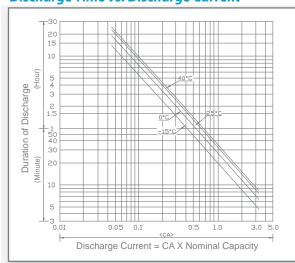

#### **Discharge Characteristics**

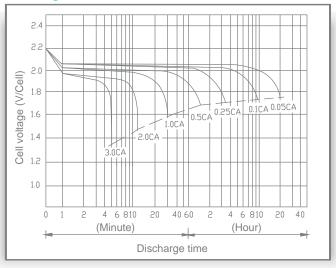




www.upgi.com


All specifications subject to change without notice.

Maintenance-Free


Shelf Life & Storage

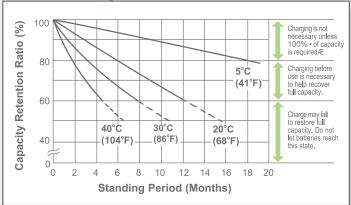




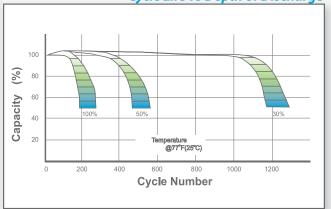

**Open Circuit Voltage vs Residual Capacity** 

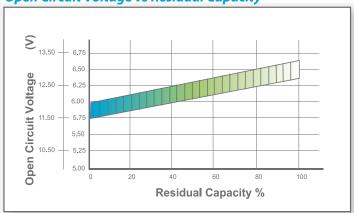

**Effect of Temperature on Capacity** 

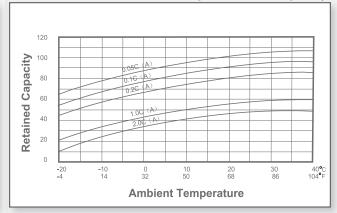

# **Charge Current & Final Discharge Voltage**

Application -	Charge Voltage(V/Cell)			May Charga Current	
	Temperature	Set Point	Allowable Range	Max.Charge Current	
Cycle Use	25°C (77°F)	2.45	2.43~2.47	0.30C	
Standby	25°C (77°F)	2.28	2.27~2.30	0.300	

Final Discharge Voltage V/Cell	1.75	1.70	1.60	1.30
Discharge Current(A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C





Let UPG Power Your Life.